


## SK-IP

Push-on insulating sleeve.

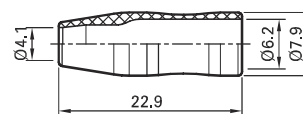


Order No.	Type	*Colours
68.9514-*	SK-IP	23 28

## AB200

Test clip with steel jaws especially for connections to ground rails and thick cables. For increased safety when making connec-

tions, the jaws are insulated on the outside. Ø 4 mm rigid socket in handle accepting


spring-loaded Ø 4 mm plugs with rigid insulating sleeve.

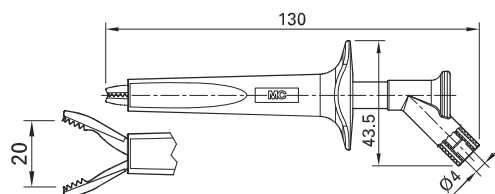

Order No.	Type	Rated voltage/current		*Colours
66.9474-*	AB200	1000 V, CAT IV / 20 A	Ni CE cUL US LISTED	21 22 23 28

## GH200 GH284

Ø 2 mm Reference lead with hook clip (length 15 cm).

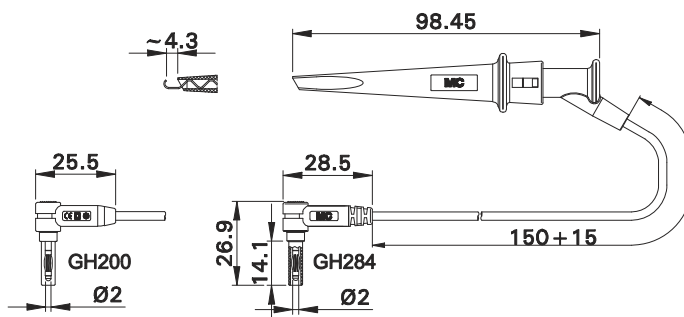

Order No.	Type	Rated voltage	Lead cross section		Lead length [cm]	Colour
68.9486-01521	GH200	1000 V, CAT II (600 V, CAT III)	0.50 mm <sup>2</sup>	SIL CE cUL US LISTED	015	21
68.9519-01521	GH284	1000 V, CAT III (600 V, CAT IV)	0.50 mm <sup>2</sup>	SIL CE cUL US LISTED	015	21