


Isoprobe II – 10:1 ECO

Safety high-frequency 10:1 test probe highly flexible PVC-insulated coaxial connecting lead with BNC plug. Compensation adjust-

ment screw and Ø 2 mm safety socket for reference lead connection in the handling part. Economically priced model.

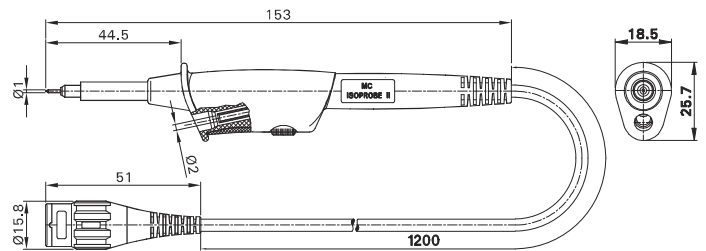

| Order No. | Type | | Lead length [cm] | Colour |
|---------------|------------------------|-------------------|------------------|--------|
| 68.9880-12028 | Isoprobe II – 10:1 ECO | PVC CE cUL LISTED | 120 | 28 |

| Technical Data | | |
|-------------------------------------|-------------------------------------|--|
| Rated voltage (frequency-dependent) | Max. 600 V, CAT II (300 V, CAT III) | |
| Dividing ratio | 10:1 | |
| Input capacitance | 13 pF | |
| Compensation range (works setting) | 10 pF ... 30 pF (15 pF) | |
| Input resistance | 10 MΩ | |
| Frequency range | 0 ... 500 MHz | |
| Rise time | 1 ns | |
| Lead length | 120 cm | |




User information i048

www.staubli.com/electrical





SET Isoprobe II – 10:1 ECO


The basic set Isoprobe II - 10:1 ECO includes a basic set of accessories for effect- ing safe and accurate high-frequency mea- surements. Good value for money.



| Order No. | Type | Rated voltage | | Colour |
|------------|----------------------------|-------------------------------------|--|--------|
| 68.9491-28 | SET Isoprobe II – 10:1 ECO | Max. 600 V, CAT II (300 V, CAT III) |  | 28 |

Supplied components

| | |
|-----------------------------------|---|
| Isoprobe II – 10:1 ECO Page 14 |  |
| HC200 Page 37 |  |
| GS400 Page 38 |  |
| GM200 Page 40 |  |

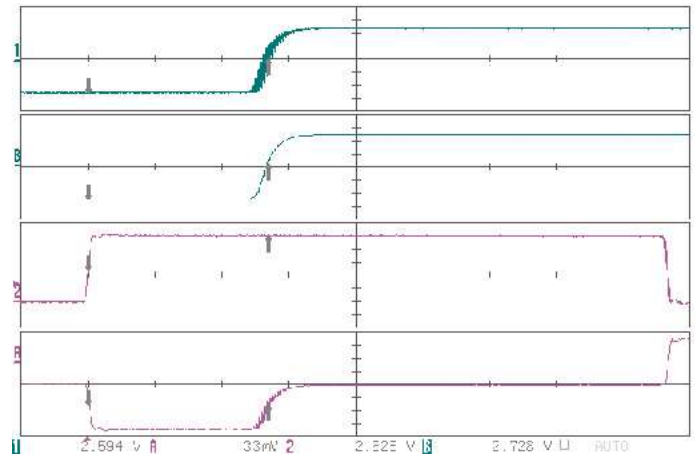

User information **i048**

www.staubli.com/electrical