
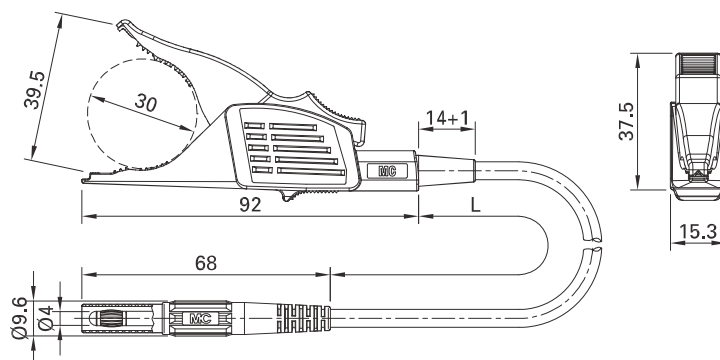


Test clip lead XDLS-418

Highly flexible. One end with dolphin clip with all-round insulation, toothed jaws for wide grip and surface for fine wire. The other

end with Ø 4 mm MULTILAM plug with rigid insulating sleeve.

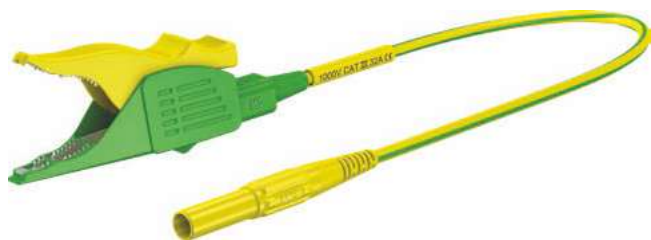

| Order No. | Type | Rated voltage/current | Lead | | Lead length [cm] | *Standard colors |
|--------------|----------|------------------------|-------------------------|-------|------------------|------------------|
| 66.9531-150* | XDLS-418 | 1000 V, CAT III / 32 A | PVC 2.5 mm ² | Ni CE | 150 | 20 21 22 |





Optional colors 23 24 25 26 27 28 29

Further information, page 6

Test clip GRIP-CI

With steel jaws especially for connections to ground rails and thick cables. For increased safety when making connections, the jaws

are insulated on the outside. Ø 4 mm rigid socket in handle accepting spring-loaded Ø 4 mm plugs with rigid insulating sleeve.

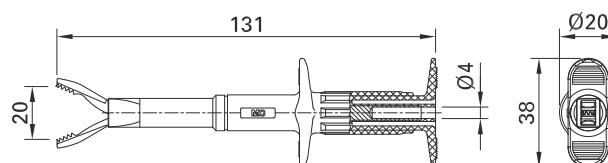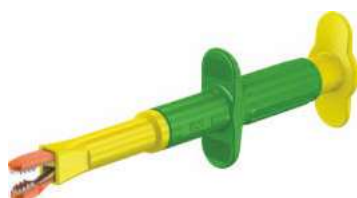

| Order No. | Type | Rated voltage/current | | *Standard colors |
|-----------|---------|------------------------|---------------|----------------------|
| 66.9121-* | GRIP-CI | 1000 V, CAT III / 16 A | Ni CE c UL US | 20 21 22 23 24 25 26 |



Optional colors 29

Further information, page 6