


Test clip GRIP-DI

With steel jaws especially for connections to ground rails and thick cables. For increased safety when making connections, the jaws are insulated on the outside. Ø 4 mm rigid socket in handle accepting spring-loaded

Ø 4 mm plugs with rigid insulating sleeve. Transparent fuse holder sleeve to accept a high-rating fuse 10 mm x 38 mm.

The fuse is not supplied.

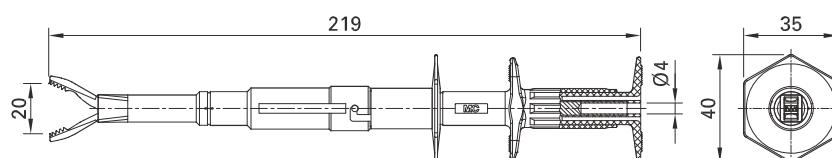

Order No.	Type	Rated voltage/current		*Standard colors
66.9266-*	GRIP-DI	1000 V, CAT III / max. 16 A ¹⁾	Ni CE c UL ²⁾ US	21

¹⁾ Depends on the fuse used.

²⁾ Only if used with UL approved fuses.



Optional colors 22 23 24 25 26

Further information, page 6



High breaking capacity fuse: page 173



User information i068

www.staubli.com/electrical